


**The manufacturer does not specify a rear CAMBER adjustment.**

## **Rear TOE**

The compensator arm mounting plate is slotted to allow for adjustment.

Compensator Arm

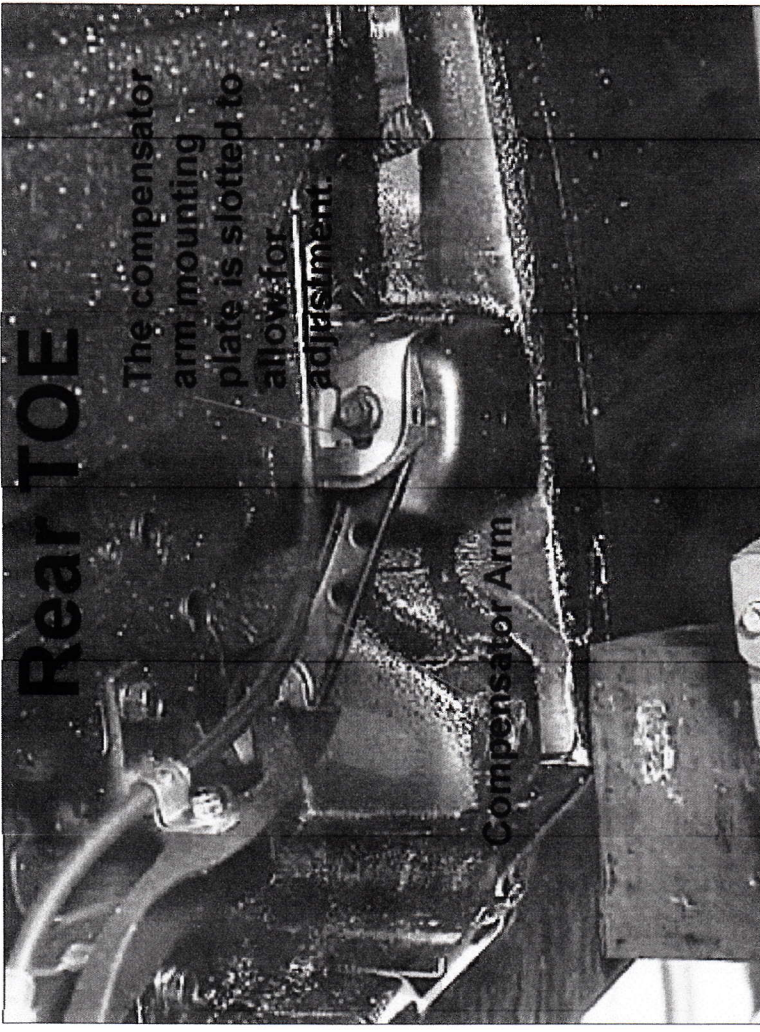

**The manufacturer does not specify front CAMBER and CASTER adjustments.**

## **Front TOE**

Loosen locknut and, if necessary, dust boot clamp. Rotate tie-rod to adjust TOE.

Locknut

