

# Dashboard

## Driver's Dashboard Under Cover Removal/Installation


**NOTE:** Take care not to scratch the dashboard and related parts.

### 1. Remove the driver's dashboard under cover (A).

- 1 Turn the lock knob (B) 90°.
- 2 Gently pull down the rear edge to release the clip (C).
- 3 Pull the cover away to release it from the clip (D).

#### Fastener Location

C ▷ : Clip, 1

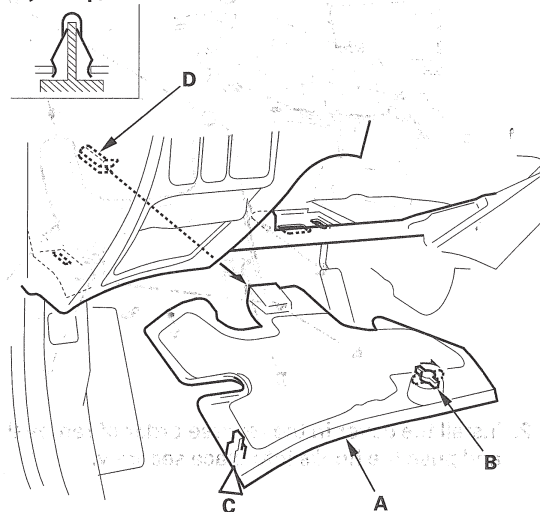

### 2. Install the cover in the reverse order of removal, and push the clip into place securely.

## Dashboard Pocket Removal/Installation

**NOTE:**


- Put on gloves to protect your hands.
- Take care not to scratch the dashboard and related parts.

### 1. Remove the driver's pocket (A):

- 1 Remove the driver's dashboard under cover.
- 2 Open the pocket, and remove the screw (B).
- 3 From behind the dashboard, push the pocket back by hand to release the clips (C).
- 4 Release the hooks (D).
- 5 If equipped, disconnect the cruise control main switch connector (E), moonroof switch connector (F), and power mirror switch connector (G).

#### Fastener Locations

B ▷ : Screw, 1 C ▷ : Clip, 2

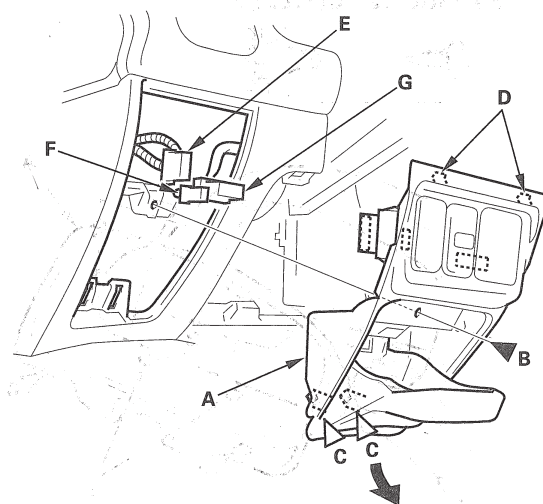

### 2. Install the pocket in the reverse order of removal, and note these items:

- Make sure each connector is plugged in properly (for some models).
- Push the clips into place securely.